


Dan-Inject Instruction, maintenance of the dart syringe.

After cleaning the syringe retract the black plunger using an air filler syringe fitted with a DAN-INJECT coupling adaptor.



Place one drop silicon oil into the drug chamber. Do not allow any oil onto the external surface of dart syringe needle boss.

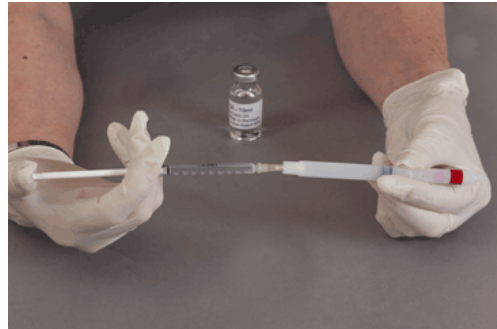

Using the air filler syringe move the black plunger forwards and backwards several times.

